


Ceiling swirl diffusers


Type RFD-SIRIUS



RFD-Sirius, cross bar




Horizontal swirling air discharge




Circular diffuser face



RFD-SIRIUS, integral measuring tubes



RFD-SIRIUS, volume flow controller

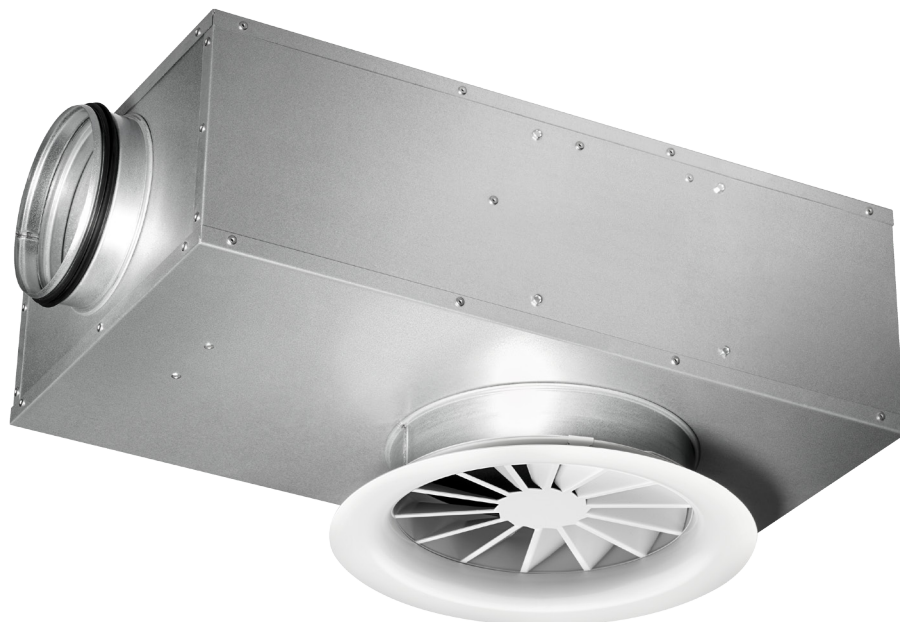

RFD-SIRIUS is an air terminal device combined with a VAV terminal unit

RFD-SIRIUS is used in ventilation and air conditioning systems for the demand-based volume flow control and as an air terminal device.

- RFD nominal sizes: 160, 200, 250, 315 and 400
- SIRIUS nominal sizes: 125, 160, 200 and 250
- Volume flow rate range: 4.7 to 171.3 l/s or 17 to 617 m³/h
- For supply air
- Flush ceiling installation, with discharge nozzle also suspended installation
- Control input signal via MP bus, LonWorks FTT-10A, Modbus RTU, or analogue signal
- Integral noise insulation element
- High induction results in a rapid reduction of the temperature difference and airflow velocity
- Ideal for comfort zones

Optional equipment and accessories

- Exposed diffuser face available in RAL CLASSIC colours

Type		Page
RFD-SIRIUS	General information	SIRIUS – 2
	Function	SIRIUS – 4
	Technical data	SIRIUS – 5
	Quick sizing	SIRIUS – 6
	Specification text	SIRIUS – 8
	Order code	SIRIUS – 9
	Variants	SIRIUS – 11
	Dimensions and weight	SIRIUS – 12
	Installation examples	SIRIUS – 16
	Installation details	SIRIUS – 17
	Basic information and nomenclature	SIRIUS – 19

Application

Application

- For supplying air to comfort zones in cases where the supply air flow rate is to be controlled
 - The variant with discharge nozzle allows for suspended installation
 - The efficient swirl creates high induction levels, thereby rapidly reducing the temperature difference and airflow velocity
 - Closed-loop volume flow control using an external power supply
 - Differential pressure measurement with integral measuring tubes
- volume flow controller, sound attenuator, plenum box and air terminal device in one unit.
- Low sound power level, ideal for comfort zones
 - For all types of ceiling systems, also suitable for freely suspended installation
 - Differential pressure measurement with integral measuring tubes

Nominal sizes

- RFD: 160, 200, 250, 315 und 400
- SIRIUS: 125, 160, 200 and 250

Special characteristics

- RFD-SIRIUS combines the functions of a

Description

Variants

- Diffuser face
- RFD-R: Circular diffuser face
 - RFD-Q: Square diffuser face
 - RFD-*-D: Diffuser face with discharge nozzle

Control components

- BC0
- BL0
- BM0
- BM0-J6

For information on control components see Type Compact controllers.

Parts and characteristics

- Circular or square diffuser face
- Diffuser face with radially arranged fixed air control blades
- Control component can be moved back and

forth

Attachments

- Variable volume flow control with electronic Compact controller to switch an external control signal and an actual value signal for integration into the central BMS.
- Supply voltage 24 V AC/DC
 - The signal interface depends on the selected control component variant
 - Variable air or constant air volume flow control
 - The flow rate is measured according to the dynamic measurement principle
 - Volume flow rate control range: approx. 10 – 100 % of the nominal volume flow rate

Deviation from the operating range:

- 10 – 20% of the nominal volume flow rate: +/- 25%

- 20 – 40% of the nominal volume flow rate: +/
- 10%
- 40 – 100% of the nominal volume flow rate: +/
- 4%

Electrical connection with cable or plug,
depending on the selected control component
variant.

Construction features

- Spigot suitable for circular ducts to EN 1506 or
EN 13180

Materials and surfaces

- Diffuser face and plenum box made of
galvanised sheet steel
- Measuring unit made of aluminium

- Exposed parts of the diffuser face powder-
coated RAL 9010, pure white
- P1: Powder-coated, RAL CLASSIC colour
- Noise insulating fleece on the controller cage

Standards and guidelines

- Sound power level of the air-regenerated noise
measured according to EN ISO 5135
- Hygiene conforms to VDI 6022

Maintenance

- Maintenance-free as construction and
materials are not subject to wear
- Inspection and cleaning to VDI 6022

Functional description


RFD-SIRIUS combines the functions of a volume flow controller, sound attenuator, plenum box and air terminal device in one unit.

The differential pressure is measured with integral measuring tubes and transmitted to the controller.

An integral linear actuator adjusts the damper such that the required setpoint value is achieved.

The construction of the diffuser ensures that sound is effectively absorbed, which results in low sound power levels.

Schematic illustration of the RFD, with Sirius

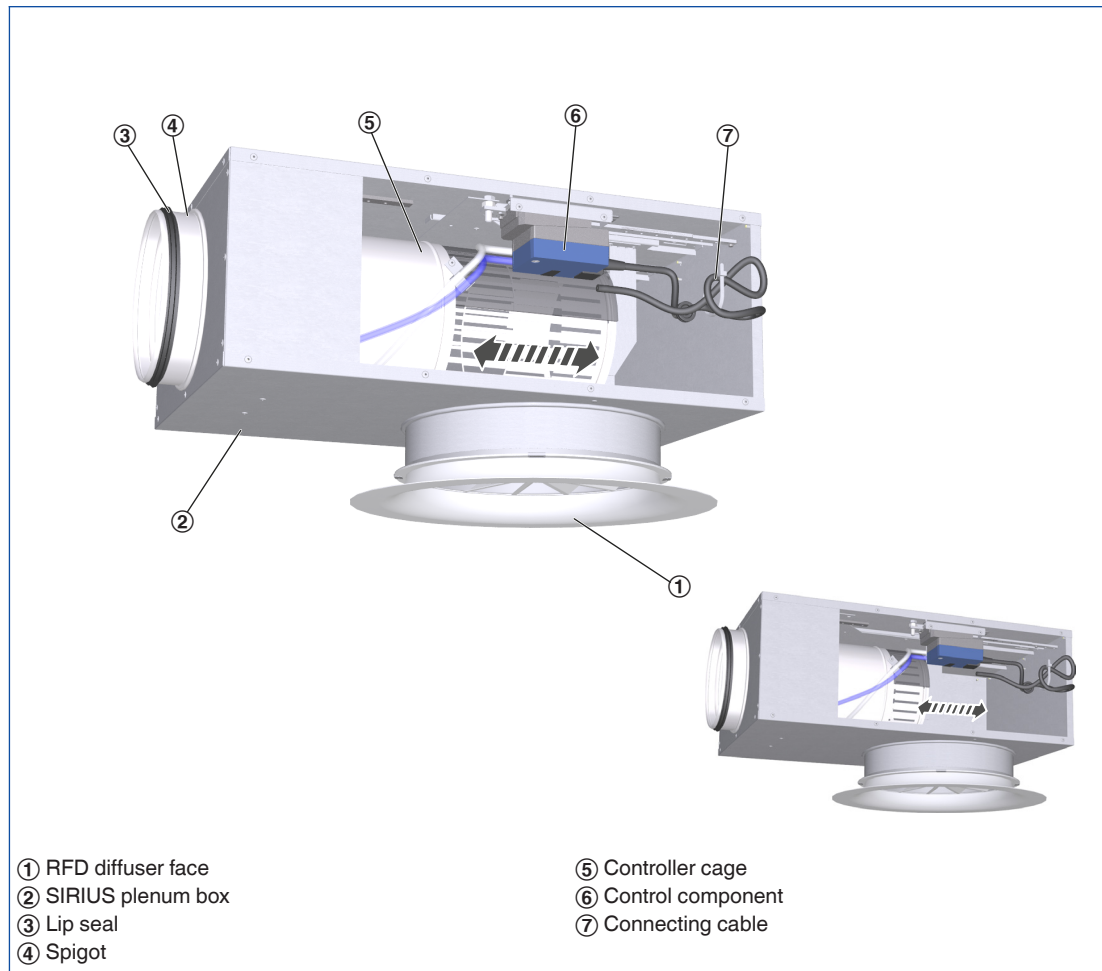

Air patterns

Horizontal air discharge

Horizontal omni directional air discharge



RFD nominal sizes	160, 200, 250, 315, 400 mm
SIRIUS nominal sizes	125, 160, 200, 250 mm
Volume flow rate	4.7 – 171.4 l/s or 17 – 617 m ³ /h
Supply air to room air temperature difference	-12 to +10 K

Quick sizing tables provide a good overview of the volume flow rates and corresponding sound power levels and differential pressures.
The minimum volume flow rates apply to a supply air to room air temperature difference of -6 K.
The maximum volume flow rates apply to a sound power level of approx. 50 dB (A).

Sound power level [dB (A)] – RFD-SIRIUS

Combination	\dot{V}		Δp_t			
	l/s	m ³ /h	Pa			
			50	100	200	300
RFD-160 SIRIUS 125	5	17	≤15	≤15	≤15	15
	14	52	25	27	29	30
	24	87	32	34	36	37
	34	123	36	38	40	42
RFD-200 SIRIUS 125	7	25	15	17	20	22
	22	80	25	28	31	33
	37	134	30	33	36	38
	53	189	33	36	39	41
RFD-200 SIRIUS 160	7	25	≤15	15	18	20
	25	90	25	29	32	33
	43	155	31	34	37	39
	61	219	–	38	41	43
RFD-250 SIRIUS 160	10	37	≤15	15	18	20
	34	121	23	26	29	31
	57	204	27	31	34	35
	80	288	31	34	37	39
RFD-250 SIRIUS 200	10	37	20	24	28	30
	39	141	28	32	36	38
	68	245	31	35	39	41
	97	349	–	37	41	43
RFD-315 SIRIUS 200	19	68	27	31	36	39
	50	180	29	34	39	42
	81	292	31	35	40	43
	112	404	32	36	41	44
RFD-315 SIRIUS 250	19	68	18	22	26	28
	52	187	26	30	34	36
	85	305	30	34	38	40
	118	424	32	36	40	42
RFD-400 SIRIUS 250	27	96	24	29	33	36
	73	263	29	33	38	40
	119	429	31	35	40	42
	166	596	32	36	41	44

Sound power level [dB (A)] – RFD-SIRIUS-D

Combination	\dot{V}		Δp_t			
	l/s	m ³ /h	Pa			
			50	100	200	300
RFD-D-160 SIRIUS 125	6	23	22	24	27	28
	20	72	29	31	34	35
	34	122	32	35	37	38
	48	171	34	37	39	40
RFD-D-200 SIRIUS 125	9	32	15	18	21	23
	27	97	23	27	30	32
	45	161	27	31	34	36
	63	226	30	33	36	38
RFD-D-200 SIRIUS 160	9	32	20	23	26	28
	34	121	28	31	34	36
	58	210	32	35	37	39
	83	299	34	37	40	41
RFD-D-250 SIRIUS 160	14	50	≤15	15	19	22
	37	134	19	24	28	31
	61	218	24	28	33	35
	84	303	27	31	36	38
RFD-D-250 SIRIUS 200	14	50	20	25	30	32
	47	170	27	32	37	40
	81	290	30	35	40	43
	114	410	32	37	42	45
RFD-D-315 SIRIUS 200	25	90	23	29	35	39
	59	214	26	32	38	42
	94	339	27	34	40	44
	129	463	28	35	41	45
RFD-D-315 SIRIUS 250	25	90	22	26	29	31
	68	245	28	31	35	37
	111	401	30	34	37	39
	154	556	32	36	39	41
RFD-D-400 SIRIUS 250	36	128	25	28	31	34
	81	291	29	32	34	38
	126	454	31	34	37	40
	171	617	32	36	38	41

This specification text describes the general properties of the product. Texts for variants can be generated with our Easy Product Finder design programme.

RFD-SIRIUS is an air terminal device combined with a VAV terminal unit.

The ceiling diffuser with a square or circular diffuser face is preferably used as a supply air diffuser for comfort zones.

The fixed air control blades allow for horizontal swirling supply air discharge creating high induction levels.

The diffuser is suitable for installation into all types of suspended ceilings.

The diffuser is fixed with a central fixing screw to the cross bar (no tools required); the cross bar is inserted into the SIRIUS plenum box (no tools required) and held in place with magnets.

The SIRIUS plenum box is fitted with two spigots, one for connection to the ductwork and another one for connection of the diffuser face.

The SIRIUS plenum box contains two cylinders, one fitted inside the other; one of the cylinders is perforated.

The perforated cylinder is moved along a toothed bar upon control input from the volume flow controller, and the free area changes as a consequence.

A fleece covering the perforated cylinder acts as an equalising element.

This special construction feature allows for omitting any additional sound attenuator.

Special characteristics

- RFD-SIRIUS combines the functions of a volume flow controller, sound attenuator, plenum box and air terminal device in one unit.
- Low sound power level, ideal for comfort zones
- For all types of ceiling systems, also suitable for freely suspended installation
- Differential pressure measurement with integral measuring tubes

Materials and surfaces

- Diffuser face and plenum box made of galvanised sheet steel
- Measuring unit made of aluminium
- Exposed parts of the diffuser face powder-coated RAL 9010, pure white
- P1: Powder-coated, RAL CLASSIC colour

- Noise insulating fleece on the controller cage

Attachments

Variable volume flow control with electronic Compact controller to switch an external control signal and an actual value signal for integration into the central BMS.

- Supply voltage 24 V AC/DC
- The signal interface depends on the selected control component variant
- Variable air or constant air volume flow control
- The flow rate is measured according to the dynamic measurement principle
- Volume flow rate control range: approx. 10 – 100 % of the nominal volume flow rate

Deviation from the operating range:

- 10 – 20% of the nominal volume flow rate: +/- 25%
- 20 – 40% of the nominal volume flow rate: +/- 10%
- 40 – 100% of the nominal volume flow rate: +/- 4%

Electrical connection with cable or plug, depending on the selected control component variant.

Technical data

- RFD nominal sizes: 160, 200, 250, 315, 400 mm
- SIRIUS nominal sizes: 125, 160, 200, 250 mm
- Volume flow rate: 4.7 – 171.4 l/s or 17 – 617 m³/h
- Supply air to room air temperature difference: -12 to +10 K

Sizing data

- \dot{V} _____
[m³/h]
- Δp_t _____
[Pa]
- Air-regenerated noise
- L_{WA} _____
[dB(A)]

RFD with Sirius

RFD-SIRIUS – R – D – T / 160 – 250 / BC0 / E0 / 40 – 200 / P1 – RAL 9010								
1	2	3	4	5	6	7	8	9

1 Type

RFD-SIRIUS Ceiling diffuser

2 Construction style

R Circular
Q Square

3 Construction

No entry: without discharge nozzle
D With discharge nozzle

4 Connection

T Cross bar with magnets and quick fixing kit

5 Nominal size [mm]

∅ spigot for duct connection
125 For diffuser faces 160 and 200
160 For diffuser faces 200 and 250
200 For diffuser faces 250 and 315
250 For diffuser faces 315 and 400

∅ spigot for diffuser face connection (nominal size of diffuser face)

160
200
250
315
400

6 Attachment (control component)

BC0 Volume flow controller with MP bus interface and analogue interface 0 – 10 V / 2 – 10 V
BLO Volume flow controller with LonWorks FTT-10A interface
BM0 Volume flow controller with Modbus RTU interface
BM0-J6 Volume flow controller with Modbus RTU interface and RJ12 socket for connecting an X-AIRCONTROL zone module

7 Signalling (can be selected only for BC0)

E0 0 – 10 V DC (variable volume flow rate)
F0 0 – 10 V DC (constant volume flow rate)
E2 2 – 10 V DC (variable volume flow rate)
F2 2 – 10 V DC (constant volume flow rate)

8 Volume flow rate

Variable: $\dot{V}_{\min}, \dot{V}_{\max}$
Constant: \dot{V}_{const}

9 Exposed surface of diffuser face

No entry: powder-coated RAL 9010, pure white
P1 Powder-coated, specify RAL CLASSIC colour

Gloss level
RAL 9010 50 %
RAL 9006 30 %
All other RAL colours 70 %

Order example: RFD-SIRIUS-R-D-T/160-250/BC0/E0/60-180/P1-RAL 9016

Construction style	Circular
Construction	With discharge nozzle
Connection	Cross bar with magnets and quick fixing kit
∅ spigot for duct connection	160 mm
Nominal size of diffuser face	250 mm
Control component	Volume flow controller with MP bus interface and analogue interface 0 – 10 V / 2 – 10 V
Control input signal	0 – 10 V DC (variable volume flow rate)
Volume flow rate	60 – 180 m ³ /h
Exposed surface of diffuser face	Powder-coated RAL 9016, traffic white, gloss level 70%

Order example: RFD-SIRIUS-Q-T/160-250/BM0/100-160


Construction style	Square
Construction	Without discharge nozzle
Connection	Cross bar with magnets and quick fixing kit
Ø spigot for duct connection	160 mm
Nominal size of diffuser face	250 mm
Control component	Volume flow controller with Modbus RTU interface
Control input signal	Modbus RTU
Volume flow rate	100 – 160 m ³ /h
Exposed surface of diffuser face	Powder-coated RAL 9010, pure white, gloss level 25%

Diffuser faces

RFD-Q-D



RFD-R-D



RFD-Q



RFD-R




Product examples

Plenum boxes

RFD-SIRIUS



RFD-SIRIUS-Q

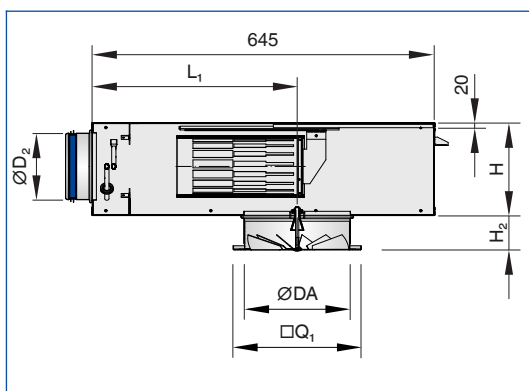


RFD-SIRIUS-Q

Nominal size	ØDA	□Q ₁	ØD ₂	B	L ₁	H	H ₂	A _{eff}	m	SIRIUS weight	RFD weight
	mm										
RFD 160 SIRIUS 125	158	198	123	325	386	175	60	0.0037	9.2	8.5	0.7
RFD 200 SIRIUS 125	198	248	123	325	386	175	60	0.0066	9.0	8.0	1.0
RFD 200 SIRIUS 160	198	248	158	360	402	210	60	0.0066	10.5	9.5	1.0
RFD 250 SIRIUS 160	248	298	158	360	402	210	60	0.0110	10.5	9.0	1.5
RFD 250 SIRIUS 200	248	298	198	400	435	240	60	0.0110	12.5	11.0	1.5
RFD 315 SIRIUS 200	313	398	198	400	435	240	60	0.0205	12.9	10.5	2.4
RFD 315 SIRIUS 250	313	398	248	450	392	290	60	0.0205	14.9	12.5	2.4
RFD 400 SIRIUS 250	398	498	248	450	392	290	60	0.0280	15.6	12.0	3.6

□Q₁ is available as an option for all ØDA units in sizes 593, 598, 618 and 623

RFD-SIRIUS-Q-D

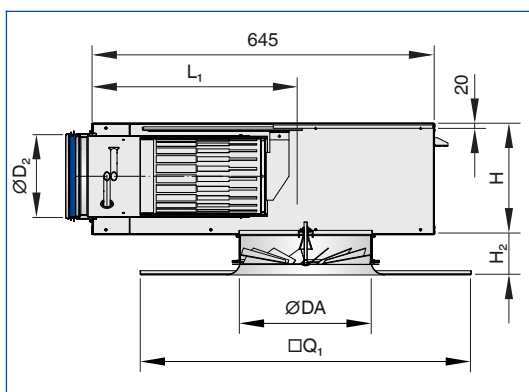


RFD-SIRIUS-Q-D


Nominal size	ØDA	□Q ₁	ØD ₂	B	L ₁	H	H ₂	A _{eff}	m	SIRIUS weight	RFD weight
	mm									kg	
RFD 160 SIRIUS 125	158	248	123	325	386	175	80	0.0060	9.4	8.5	0.9
RFD 200 SIRIUS 125	198	248	123	325	386	175	80	0.0092	9.2	8.0	1.2
RFD 200 SIRIUS 160	198	248	158	360	402	210	80	0.0092	10.7	9.5	1.2
RFD 250 SIRIUS 160	248	298	158	360	402	210	80	0.0150	10.7	9.0	1.7
RFD 250 SIRIUS 200	248	298	198	400	435	240	80	0.0150	12.7	11.0	1.7
RFD 315 SIRIUS 200	313	398	198	400	435	240	90	0.0265	13.4	10.5	2.9
RFD 315 SIRIUS 250	313	398	248	450	392	290	90	0.0265	15.4	12.5	2.9
RFD 400 SIRIUS 250	398	498	248	450	392	290	90	0.0355	16.3	12.0	4.3

□Q₁ is available as an option for all ØDA units in sizes 593, 598, 618 and 623

RFD-SIRIUS-Q and RFD-SIRIUS-Q-D (RFD-SIRIUS-Q-D shown)

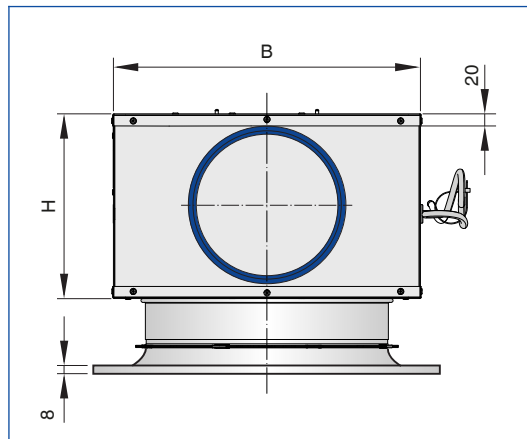


RFD-SIRIUS-R

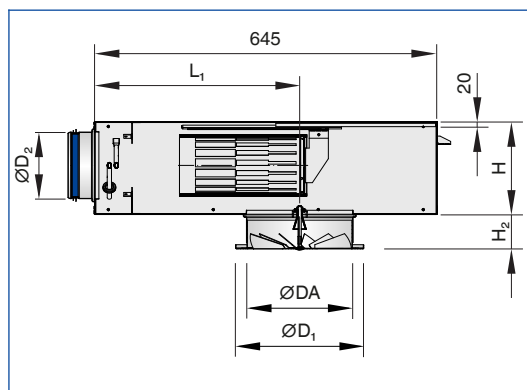

RFD-SIRIUS-R

Nominal size	$\varnothing DA$	$\varnothing D_1$	$\varnothing D_2$	B	L_1	H	H_2	A_{eff}	m	SIRIUS weight	RFD weight
	mm								m ²	kg	
RFD 160 SIRIUS 125	158	197	123	325	386	175	55	0.0037	9.1	8.5	0.6
RFD 200 SIRIUS 125	198	241	123	325	386	175	55	0.0066	8.9	8.0	0.9
RFD 200 SIRIUS 160	198	241	158	360	402	210	55	0.0066	10.4	9.5	0.9
RFD 250 SIRIUS 160	248	295	158	360	402	210	55	0.0110	10.3	9.0	1.3
RFD 250 SIRIUS 200	248	295	198	400	435	240	55	0.0110	12.3	11.0	1.3
RFD 315 SIRIUS 200	313	364	198	400	435	240	55	0.0205	12.4	10.5	1.9
RFD 315 SIRIUS 250	313	364	248	450	392	290	55	0.0205	14.4	12.5	1.9
RFD 400 SIRIUS 250	398	450	248	450	392	290	55	0.0280	14.9	12.0	2.9


RFD-SIRIUS-R-D

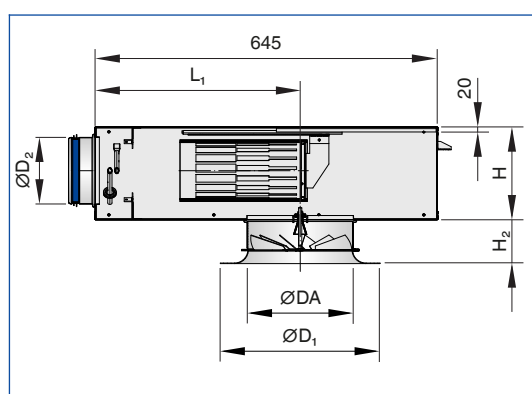

RFD-SIRIUS-R-D

Nominal size	$\varnothing DA$	$\varnothing D_1$	$\varnothing D_2$	B	L_1	H	H_2	A_{eff}	m	SIRIUS weight	RFD weight
	mm								m ²	kg	
RFD 160 SIRIUS 125	158	250	123	325	386	175	80	0.0060	9.5	8.5	1.0
RFD 200 SIRIUS 125	198	300	123	325	386	175	80	0.0092	9.3	8.0	1.3
RFD 200 SIRIUS 160	198	300	158	360	402	210	80	0.0092	10.8	9.5	1.3
RFD 250 SIRIUS 160	248	350	158	360	402	210	80	0.0150	10.8	9.0	1.8
RFD 250 SIRIUS 200	248	350	198	400	435	240	80	0.0150	12.8	11.0	1.8
RFD 315 SIRIUS 200	313	450	198	400	435	240	80	0.0265	13.3	10.5	2.8
RFD 315 SIRIUS 250	313	450	248	450	392	290	80	0.0265	15.3	12.5	2.8
RFD 400 SIRIUS 250	398	580	248	450	392	290	80	0.0355	16.1	12.0	4.1

RFD-SIRIUS-R and RFD-SIRIUS-R-D (RFD-SIRIUS-R-D shown)

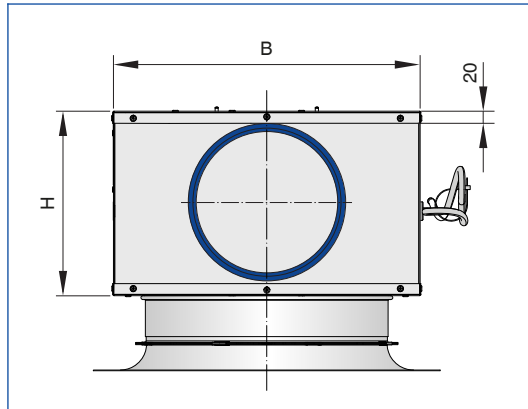

Installation in continuous ceilings



Installation in continuous ceilings




Installation and commissioning

- Preferably for rooms with a clear height up to 4.0 m
- Flush ceiling installation; variant RFD-*-D is suitable for suspended installation

Upstream conditions


The volume flow rate accuracy $\Delta\dot{V}$ applies to a straight upstream section of the duct. Bends, junctions or a narrowing or widening of the duct cause turbulence that may affect measurement. Duct connections, e.g. branches off the main duct, must comply with EN 1505. Some installation situations require straight duct sections upstream.

Bend

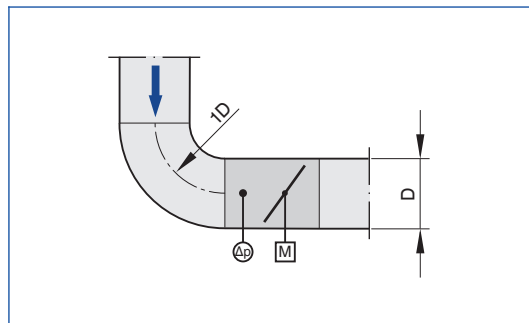

A bend with a centre line curvature radius of at least 1D – without an additional straight duct section upstream of the VAV terminal unit – has only a negligible effect on the volume flow rate accuracy.

Junction

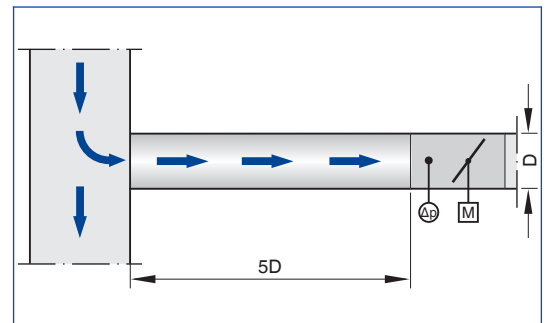


A junction causes strong turbulence. The stated volume flow rate accuracy $\Delta\dot{V}$ can only be achieved with a straight duct section of at least 5D upstream. Shorter upstream sections require a perforated plate in the branch and before the VAV terminal unit. If there is no straight upstream section at all, the control will not be stable, even with a perforated plate.


Installation types

These are only schematic diagrams to illustrate installation details.

Flush ceiling installation

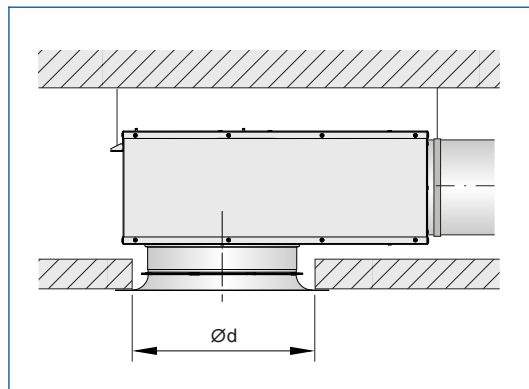


Freely suspended installation

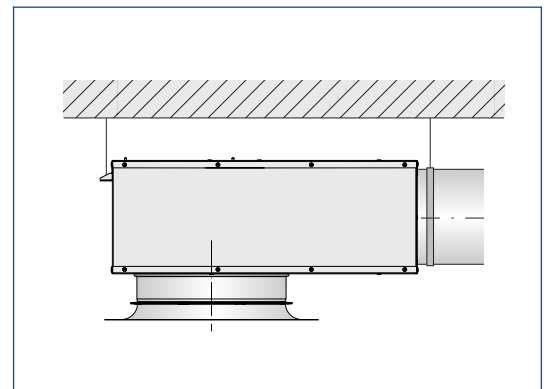

Installation opening

Nominal size	ØD_A	Ød	
		Without nozzle	With nozzle
	mm		
RFD 160	158	175	205
RFD 200	198	215	245
RFD 250	248	265	295
RFD 315	313	330	380
RFD 400	398	415	480

Installation above an open cell ceiling

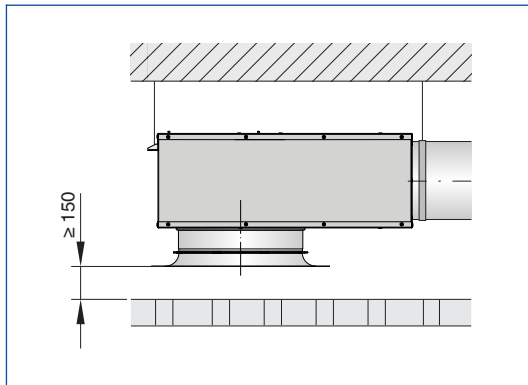

Principal dimensions

$\varnothing D$ [mm]

Outer diameter of the spigot

$\varnothing D_1$ [mm]

Outer diameter of a circular diffuser face

$\varnothing D_2$ [mm]

Diameter of a circular diffuser face style

$\varnothing D_3$ [mm]

Diameter of a circular plenum box

$\square Q_1$ [mm]

Outer diameter of a square diffuser face

$\square Q_2$ [mm]

Dimensions of a square diffuser face style

$\square Q_3$ [mm]

Dimensions of a square plenum box

H_1 [mm]

Distance (height) from the lower edge of the

suspended ceiling to the lower edge of the diffuser face

H_2 [mm]

Height of a ceiling diffuser, from the lower edge of the suspended ceiling to the upper edge of the spigot

H_3 [mm]

Height of a ceiling diffuser with plenum box, from the lower edge of the suspended ceiling to the upper edge of the plenum box or of the spigot

A [mm]

Position of the spigot, defined by the distance of the spigot centre line to the lower edge of the suspended ceiling

C [mm]

Length of the spigot

m [kg]

Weight

Nomenclature

L_{WA} [dB(A)]

A-weighted sound power level of air-regenerated noise

\dot{V} [m^3/h] and [l/s]

Volume flow rate

Δt_z [K]

Supply air to room air temperature difference, i.e.

supply air temperature minus room temperature

Δp_t [Pa]

Total differential pressure

A_{eff} [m^2]

Effective air discharge area

All sound power levels are based on 1 pW.